

A close-up, high-speed photograph of industrial machinery. A metal shaft is rotating, and a thick, golden-brown oil is being sprayed onto it from a nozzle. The background is dark and out of focus, with many small, bright, circular light spots (bokeh) from the machinery's lights.

ROKOLUB® AD SERIES

ASHLESS ANTIWEAR ADDITIVES

GENERAL INFO & USES

ROKOLUB® AD SERIES is an aryl phosphate ester-based, ashless AW/EP additive for lubricants and functional fluids, providing significant anti-wear and mild extreme pressure performance. Its unique ability to form an efficient lubricating layer on metal surfaces assures good surface protection in various equipment. Rokolub® AD additives are particularly effective in both mixed-film and the boundary lubrication, where an extremely thin lubricating film is required. Moreover, due to the fact this product range is considered to be an ashless additive, it prevents the valves and hydraulics from getting clogged up and forming sludges.

ROKOLUB® AD SERIES

With the excellent friction and wear reduction properties of Rokolub® AD, these products are the natural choice in high load conditions. These phosphorus-containing additives prevent sliding surfaces from welding under severe conditions. Rokolub® AD series provides excellent protection against excessive tool wear from scoring or galling and ensure that a lubricating film is deposited on the metal surface.

KEY APPLICATIONS

- Industrial gear oils
- Compressor oils
- Hydraulic fluids
- Turbine oils
- Greases
- Metalworking fluids
- Lubricants used at high temperature

TYPICAL PROPERTIES

Product name	Chemical name	Appearance	Acid number	Water content	Kinematic viscosity (at 40°C)	Density (at 20°C)	Phosphorous content
		visual method	in-house method	ISO 760	ISO 3104	ISO 2811	based on composition (GC-MS analysis)
		—	mgKOH/g	% w/w	mm²/s	g/cm³	% w/w
Rokolub® AD 122	phenol isopropylated phenyl phosphate	transparent, colourless to slightly yellow liquid	< 0.1	< 0.1	22	1.20	8.5
Rokolub® AD 132			< 0.1	< 0.1	32	1.12	7.9
Rokolub® AD 232	tert-butylphenyl phenyl phosphate	transparent, colourless to slightly yellow liquid	< 0.1	< 0.1	32	1.16	8.3
Rokolub® AD 246			< 0.1	< 0.1	46	1.15	8.0
Rokolub® AD 246 plus			< 0.1	< 0.1	46	1.14	7.9
Rokolub® AD 246 ultra	tert-butylphenyl phenyl phosphate	transparent, colourless to slightly yellow liquid	< 0.1	< 0.1	46	1.15	7.8
Rokolub® AD 268			< 0.1	< 0.1	68	1.13	7.5

FEATURES & BENEFITS

Our developments are created with a high regard for the environment, health, and safety. We are fully committed to producing innovative additives requiring neither labels nor classification in accordance with Globally Harmonized System. In compliance with these objectives, both Rokolub® AD 246 ultra and Rokolub® AD 268, which provide great anti-wear performance and meet non-hazard criteria, were formulated.

MAIN FEATURES

- Ashless
- Low threat level
- Superior lubricity
- Great anti-wear performance
- Mild extreme-pressure performance
- Soluble in a wide range of base stocks
- Compatible with most other types of additives
- Improved environmental & human health hazard statements


Product name	Product profile	
Rokolub® AD 122	balanced influence on environment & human health	
Rokolub® AD 132		
Rokolub® AD 232		
Rokolub® AD 246	balanced environmental impact and negligible influence on human health	
Rokolub® AD 246 plus		
Rokolub® AD 246 ultra	(no GHS class.)	negligible influence on environment & human health
Rokolub® AD 268		




ANTIWEAR PERFORMANCE



FOUR-BALL TEST RESULTS FOR ROKOLUB® AD ADDITIVES
USED IN MINERAL BASE STOCK OIL

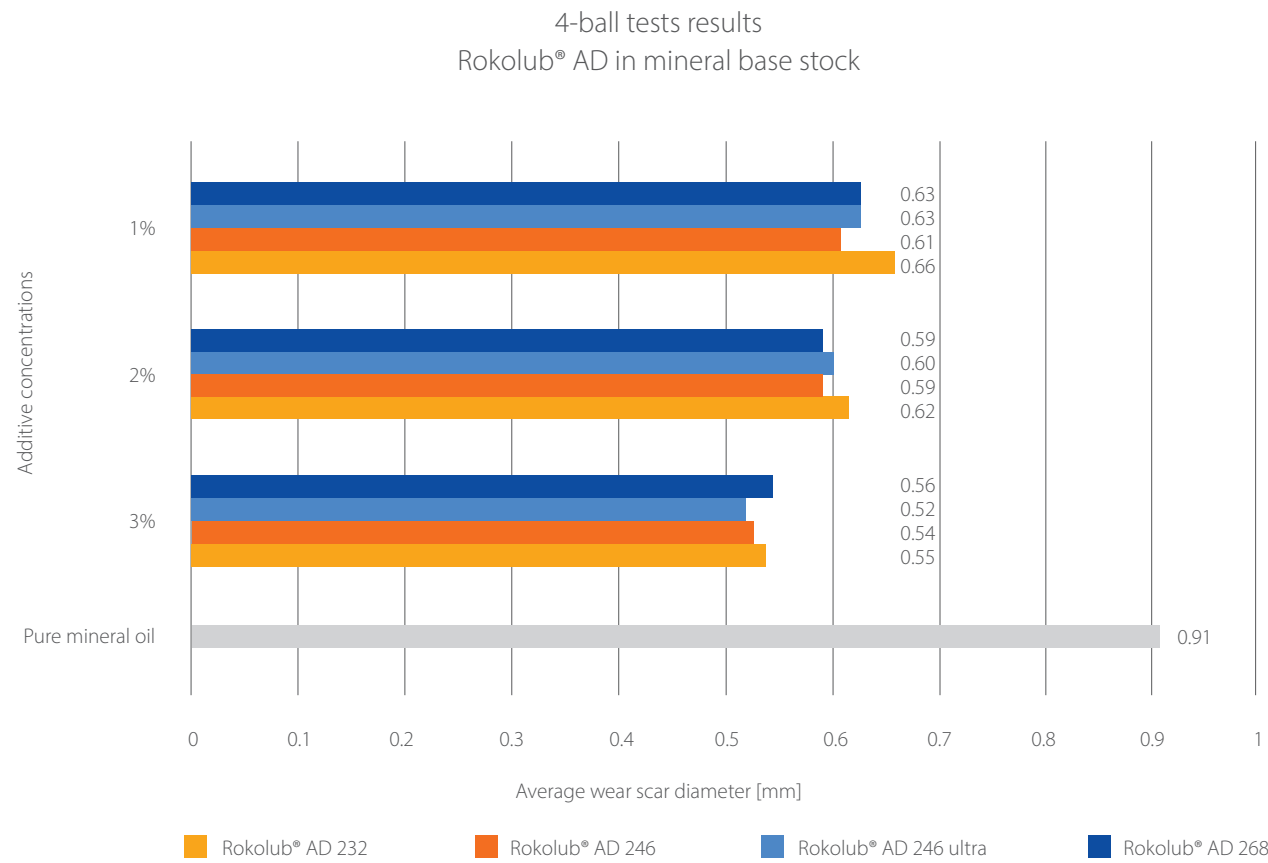

FOUR-BALL TEST RESULTS FOR ROKOLUB® AD ADDITIVES
USED IN POLY-α-OLEFIN BASE STOCK OIL

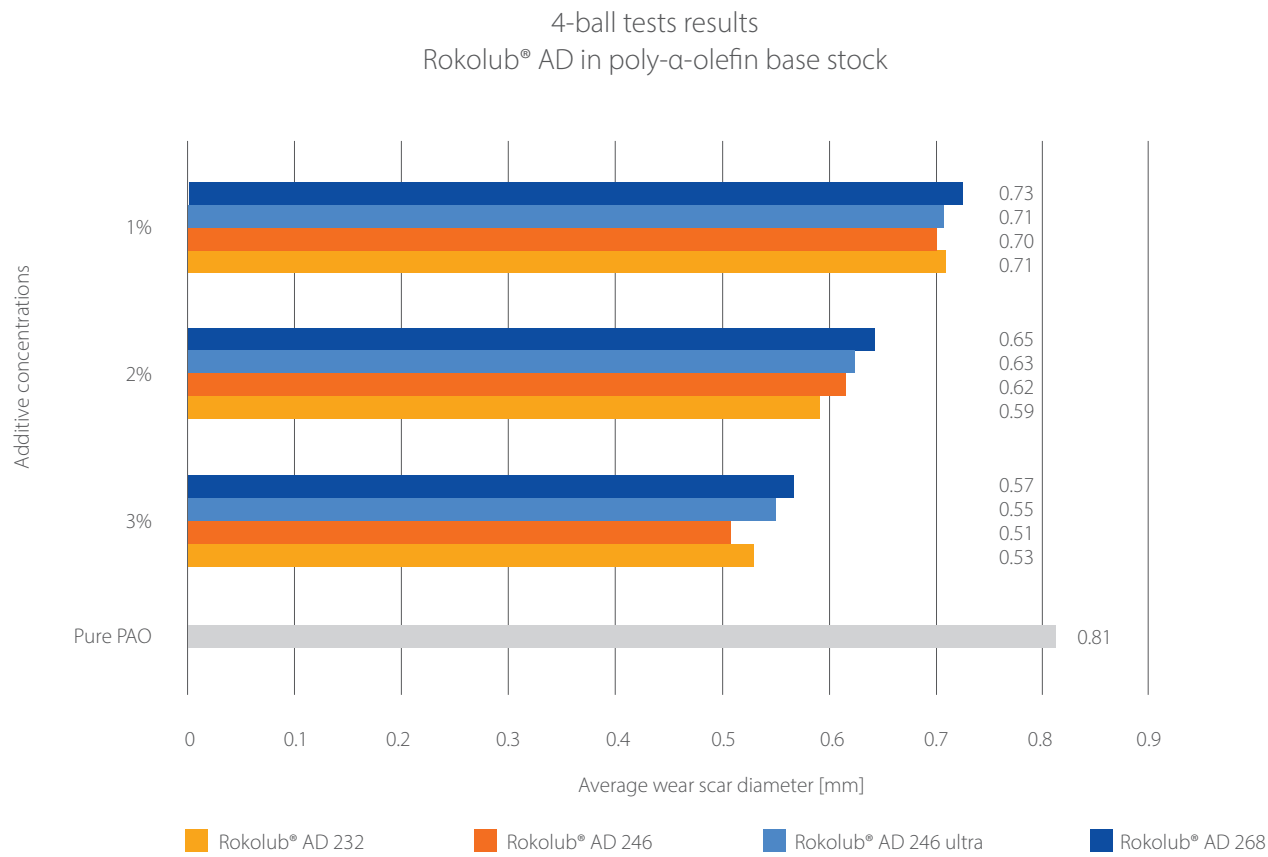


APPLICATIONS

Product name	General Industrial					Power Generation		Aviation		Metalworking	
	Gear oils	Turbine fluids	Hydraulic fluids	Compressor oils	Greases	Turbine fluids	Hydraulic fluids	Turbine fluids	Hydraulic fluids	Cooling lubricants	Neat cutting oils
Rokolub® AD 122	•	•	•	•	○	•	•	○	○	•	•
Rokolub® AD 132	•	•	•	•	○	•	•	○	○	•	•
Rokolub® AD 232	•	•	•	•	○	•	•	○	○	•	•
Rokolub® AD 246	•	•	•	•	○	•	•	○	○	•	•
Rokolub® AD 246 plus	•	•	•	•	○	•	•	○	○	•	•
Rokolub® AD 246 ultra	•	•	•	•	○	•	•	○	○	•	•
Rokolub® AD 268	•	•	•	•	○	•	•	○	○	•	•

- highly recommended use
- optional use

ANTIWEAR PERFORMANCE


FOUR-BALL TEST RESULTS FOR ROKOLUB® AD ADDITIVES USED IN MINERAL BASE STOCK OIL

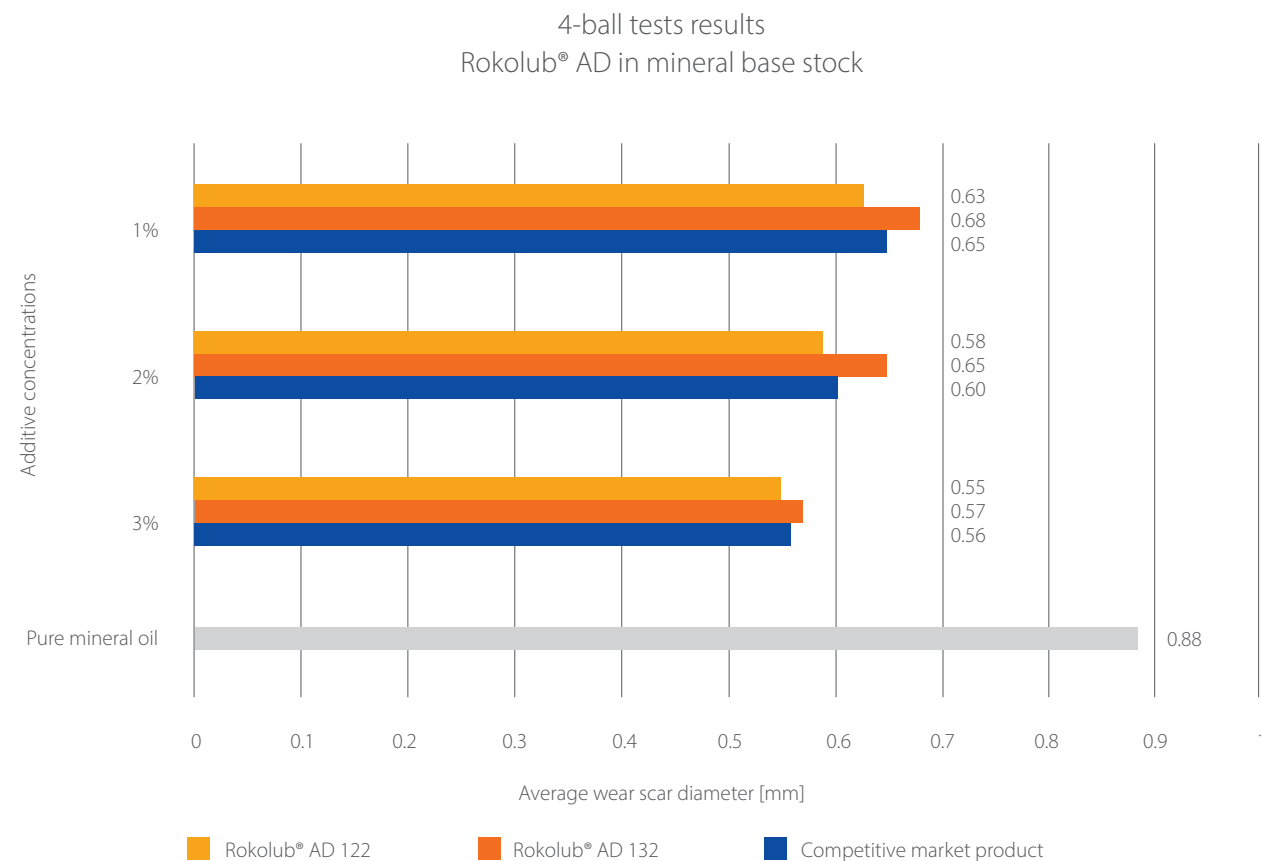

FOUR-BALL TEST

The four-ball test is a widely used method to evaluate both anti-wear and extreme pressure efficiency of lubricants. Metal surface of three balls is exposed on test conditions determined in the standards. Surface damages are evaluated and marked as a test results. The size of the scar on steel balls shows the ability of the lubricant to prevent wear and under heavy load weld point can be determined.

In this catalogue test result refers to standard ASTM D4172, method B. Applied conditions: temperature 75°C, duration 60 min, load 40 kg (392 N).

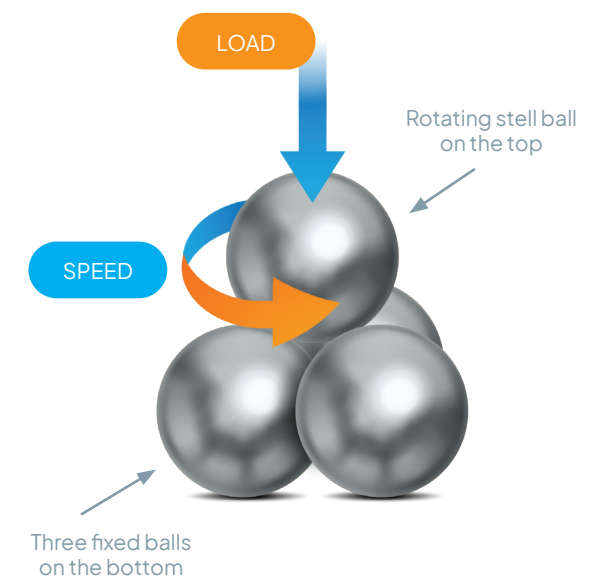


METAL SURFACE INTERACTIONS

As it is widely known lubricants create a film thickness to separate two metal surfaces. However, operating under high loads with low-speed result in the mixed-film and boundary lubricating regimes. Such events may cause partially wearing surfaces, or even lubricating film breakdown, if applied base lubricant is not sufficient formulated to working conditions. Anti-wear/extreme pressure additive are used to create additional thin layer on metal to strengthen its protection. Thanks to these additives a **chemically bonded lubricating** film is created on metal surfaces. In practice, that film features significantly better strength and that is the best opportunity for reducing friction and wear under severe conditions.


full-film lubrication

peaks and valleys share load equally

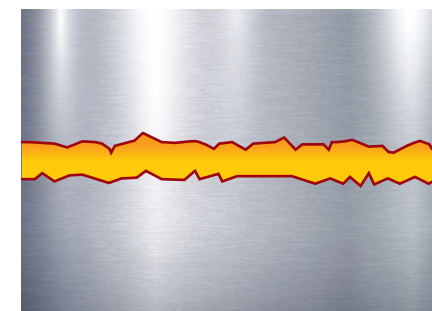


mixed-film lubrication

majority of loads rest on surface peaks

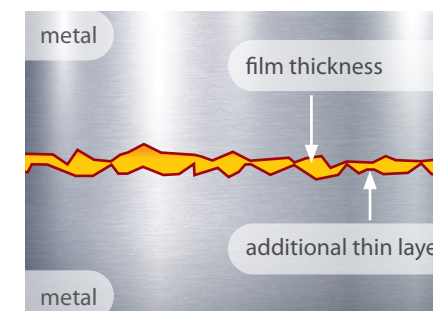

boundary lubrication

more than 90% loads rest on surface peaks

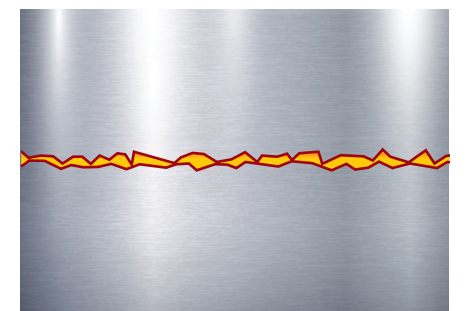



PCC Rokita SA
Sienkiewicza St. 4
56-120 Brzeg Dolny, Poland
products@pcc.eu

Please visit our capital group
business platform:
www.products.pcc.eu

September 2023



The information in the catalogue is believed to be accurate to the best of our knowledge, but should be considered as introductory only. Detailed information about the products is available in the TDS and MSDS. Suggestions for product applications are based on our the best of our knowledge.

The responsibility for the use of products in conformity or otherwise with the suggested application and for determining product suitability for your own purposes rests with the user.

All copyright, trademark rights and other intellectual and industrial property rights and the resulting rights to use this publication and its contents have been transferred to PCC Rokita SA or its licensors. All rights reserved.

Users/readers are not entitled to reproduce this publication in whole or in part, nor are they entitled to reproduce it (excluding reproduction for personal use) or to transfer it to third parties.

Permission to reproduce this information for personal use does not apply with respect to data used in other publications, in electronic information systems, or in other media publications. PCC Rokita SA shall not be responsible for data published by users.



**European
Funds**
Smart Growth

European Union
European Regional
Development Fund



The product was developed as part of a research and development project co-funded by the European Union, from the European Regional Development Fund.

pcc
*More than
Chemistry*