

ROKAnol IT Series

Ethoxylated iso-C13 fatty alcohols
Non-ionic surfactant series

AI

The images in this catalogue
were generated or modified using AI.

Local. Global. Integrated.

Operating in 18 countries, in 41 different locations, PCC Group currently employs more than 3 100 people.



About Us

PCC Exol SA is a major player in the European surfactants market. In the eastern and central-eastern part of the continent, it is the undisputed leader in its industry. Most of the production facilities and the company's headquarters are located in Brzeg Dolny, Poland. Here we develop, test and manufacture a wide range of anionic, non-ionic and amphoteric surfactants and speciality industrial formulations.

New products are continuously added to the portfolio in response to market trends and individual customer requirements. The surfactants produced at the plants have a very wide range of industrial applications. They are used as wetting agents, emulsifiers, auxiliaries in paper, metallurgy and many other industries, as well as in

household chemicals, personal care products and textiles.

Sustainable development is an important element of PCC EXOL's business approach. The company develops its management practices and processes to address environmental, social and ethical challenges. The scope of these activities is determined by the company's strategic priorities, operational capabilities and available, verifiable supporting documentation. Among other areas, PCC EXOL undertakes initiatives aimed at supporting the circular economy, improving energy and resource efficiency, enhancing safety performance, and promoting sustainability-related practices within selected elements of its value chain through cooperation with suppliers and customers.

PCC ROKITA SA PCC PCG OXYALKYLATES IRPC	PCC ROKITA SA	PCC ROKITA SA	PCC EXOL SA PCC CHEMAX INC PCC PCG OXYALKYLATES	PCC SYNTEZA
Polyols 	Chlorine 	Phosphorus 	Surfactants 	Alkylphenols 
• Polyether polyols • Polyester polyols • Prepolymers • Polyurethane Systems	• Chlorine • MCAA • Other Chlorine Downstream Product	• Phosphorus derivatives • Naphthalene derivatives • Polycarboxyethers (PCE)	• Anionic surfactants • Cationic surfactants • Nonionic surfactants • Amphoteric surfactants (betaines) • Chemical formulation	• Nonylphenol • Dodecylphenol • Tristyrylphenol
PCC CONSUMER PRODUCTS SA	PCC ROKITA SA	PCC INTERMODAL SA	PCC BAKKISILICON HF.	PCC SE
Consumer Products 	Energy 	Logistics 	Silicon 	Holding & Projects 
• Household & industrial Cleaners, Detergents and Personal Care Products	• Energy Production	• Intermodal transport • Road Haulage • Rail Transport	• Microsilica • Silicon Metal	• Portfolio Management • Project Development



ROKAnol IT Series

Chemical description

ROKAnol IT Series are nonionic surfactants of the polyethoxylated fatty alcohol type. The line of ROKAnols IT is based on fully branched, synthetic isotridecyl alcohol. Owing to the appropriate method of con-


ducting the reaction with ethylene oxide, it is possible to obtain a range of products with various ethoxylation degrees. The chemical structure of the ROKAnol IT Series is represented by the following formula:



R – branched alkyl radical, with an average carbon chain length of 13

Application

Nonionic surfactants - ROKAnol IT Series find their use in many different applications. They are especially suitable for:

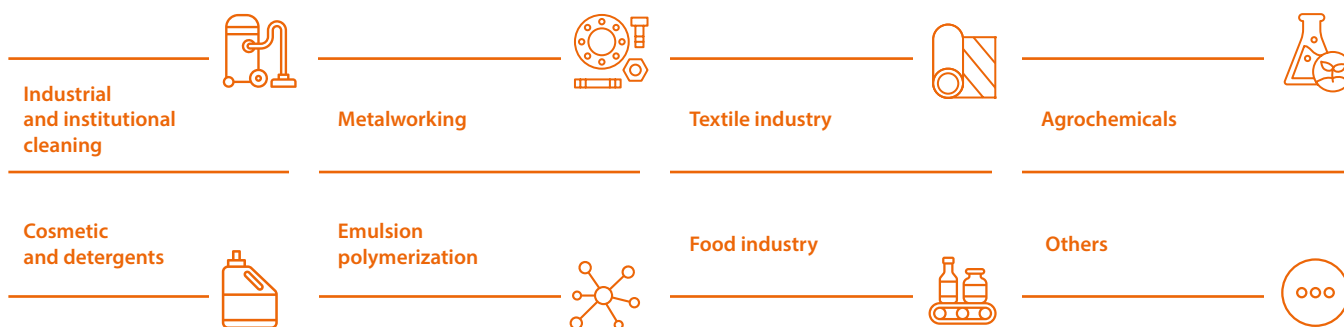

Basic physical and chemical properties

Depending on the ethoxylation degree, the appearance of the ROKAnol IT Series ranges from clear or turbid liquids to paste and

solid. Basic information concerning their physical and chemical properties is summarised in a Table 1.

General characteristic

Basic physical and chemical properties	ROKAnol IT3	ROKAnol IT4	ROKAnol IT5	ROKAnol IT6	ROKAnol IT6R	ROKAnol IT7	ROKAnol IT7W	ROKAnol IT8	ROKAnol IT8W	ROKAnol IT9
Average molecular weight [g/mol]	330	370	420	460	460	510	510	550	550	600
Appearance at room temperature	clear or cloudy liquid with a tendency to separation in time	liquid	clear or cloudy liquid with a tendency to separation in time	clear liquid ^a	clear liquid ^a	clear or turbid liquid	liquid	turbid liquid or paste	clear liquid	liquid of oily consistence
Color	max. 100 (40°C) ^a	max. 60 (40-45°C) ^a	max. 100 (40°C) ^a	max. 100 (50°C) ^a	max. 100 (50°C), a	max. 100 (50°C) ^a	max. 50 ^a	max. 50 (40°C) ^a	max. 50 (40°C) ^a	max. 70 (50°C) ^a
Solution pH	5-7 ^b	5.0 - 7.5 ^a	5 - 7 ^a	5 - 7 ^a	5 - 7 ^a	5 - 7 ^a	5 - 7 ^a	5 - 7 ^a	5 - 7 ^a	5 - 7 ^a
Cloud point A [°C]	<10	<10	<10	<10	<10	<10	<10	44	44	56 - 60
Cloud point B [°C]	<10	<10	<10	<10	<10	<10	<10	<10	<10	approx. 42
Cloud point C [°C]	<10	<10	<10	<10	<10	<10	<10	<10	<10	approx. 32
Cloud point D [°C]	48 - 51	55 - 59	approx. 67	67 - 72	71 - 73	approx. 71	approx. 71	76 - 78	75 - 79	approx. 80
Cloud point E [°C]	approx. 41	approx. 48	60 - 62	approx. 66	approx. 69	65 - 70	65 - 70	approx. 76	approx. 76	approx. 78
Solidification point [°C]	approx. -20	below -20	approx. -5	approx.-3	approx. 3	approx. 2	below -18	approx. 8	below -20	approx. 10
Density [g/cm ³]	approx. 0.93 ^c	approx. 0.96 ^c	approx. 0.96 ^c	approx. 0.97 ^c	approx. 0.97 ^c	approx. 0.97 ^c	approx. 0.98 ^c	approx. 1.00 ^c	approx. 1.00 ^c	approx. 1.01 ^c
Water content [%]	max. 1	max. 0.5	max. 0.5	max. 0.5	max. 0.5	max. 1	approx. 10	max. 0.5	approx. 10	max. 1
Surfactetension [mN/m]	27	27	27	27	27	28	28	28	28	28
HLB	8.0	9.4	10.5	11.4	11.5	12.1	12.1	12.8	12.8	13.3

Appearance at room temperature:

a – at 50°C.

Color

a – Hazen, b – Gardner.

pH according to PN-EN 1262:2004 solution B at 20°C where:

a - pH of a 1% solution,
b - pH of a 2% solution,
c - pH of a 5% solution,
d - pH of a 10% solution.

Cloud points are measured according to PN-EN 1890:2000:

Cloud point A – aqueous solution,
Cloud point B – 50 g/l NaCl solution,
Cloud point C – 100 g/l NaCl solution,
Cloud point D – 45 g butyldiglycol/water solution,
Cloud point E – 25 g butyldiglycol/water solution.

ROKAnol IT9W	ROKAnol IT10	ROKAnol IT10R	ROKAnol IT12	ROKAnol IT13	ROKAnol IT15	ROKAnol IT20	ROKAnol IT20/80	ROKAnol IT40	ROKAnol IT40/70	ROKAnol IT100/35
600	640	620	730	770	860	1080	1080	1960	1960	4600
liquid	turbid liquid or paste	turbid liquid or paste	turbid liquid or paste	clear liquid (a)	soft white solid	white to yellowish solid	clear liquid	solid	viscous liquid	liquid
max. 70 ^a	max. 100 (50°C) ^a	max. 60 (50°C) ^a	max. 70 (40°C) ^a	max. 100 (50°C) ^a	max. 2 (50°C) ^b	approx. 20 (40°C) ^a	max. 100 ^a	approx. 20 (50°C) ^a	max. 150 (25°C) ^a	max. 150 ^a
5 - 7 ^a	5 - 7 ^a	5.0 - 7.5	5 - 7 ^a	5 - 7 ^a	5 - 8 ^c	5 - 7 ^a	5 - 7 ^a	5 - 7 ^d	5 - 7 ^d	6 - 8 ^a
58 - 62	74 - 77	70 - 75	79 - 85	>90	>90	>90	>90	>90	>90	>90
approx. 42	approx. 57	approx. 55	approx. 64	74 - 76	81	84 - 88	84 - 88	>90	>90	>90
approx. 32	approx. 45	approx. 43	approx. 52	approx. 63	64 - 68	approx. 72	approx. 72	72 - 77	72 - 77	>90
approx. 80	approx. 83	approx. 83	approx. 84	approx. 87	approx. 89	approx. 90	approx. 90	>90	>90	>90
approx. 78	approx. 82	approx. 82	approx. 83	approx. 87	approx. 89	approx. 90	approx. 90	>90	>90	>90
approx. -10	approx. 18	approx. 18	approx. 20	approx. 24	approx. 24	approx. 30	approx. -4	approx. 40	approx. 9	approx. -7
approx. 1.01 ^c	approx. 1.02 ^b	approx. 1.02 ^b	approx. 1.02 ^c	approx. 1.02 ^d	approx. 1.02 ^d	approx. 1.02 ^e	approx. 1.00 ^b	approx. 1.05 ^a	approx. 1.09 ^b	approx. 1.06 ^a
approx. 10	max. 0.5	max. 0.5	max. 0.5	max. 0.5	max. 1.5	max. 1	approx. 20	max. 1	approx. 30	approx. 70
28	28	29	29	31	32	34	34	42	42	48
13.3	13.8	13.7	14.5	14.8	15.3	16.3	16.3	18.0	18.0	19.1

Density measurements:

a – at 20°C,
b – at 25°C,
c – at 30°C,
d – at 50°C,

Water content was measured according to
PN-ISO 760:2001, direct method, solvent – methanol.

Surface tension according to PN-EN 14370:2004,
determined using Wilhelmy plate method at
a temperature of 25°C and concentration of 0.1%.


HLB was determined using calculation method.

Wetting capability

In a large number of applications the capability of effective wetting is desired property of surfactants. The wetting capability of cotton fabric was determined according to **EN 1772:2001** method. Wetting

time (time in seconds necessary for wetting the textile material) was measured in ROKAnols solutions with a concentration of 1.0 g/L in demineralized water at a temperature of 20°C.

Wettability in solution concentration of 1.0 g/L in demineralised water at 20°C

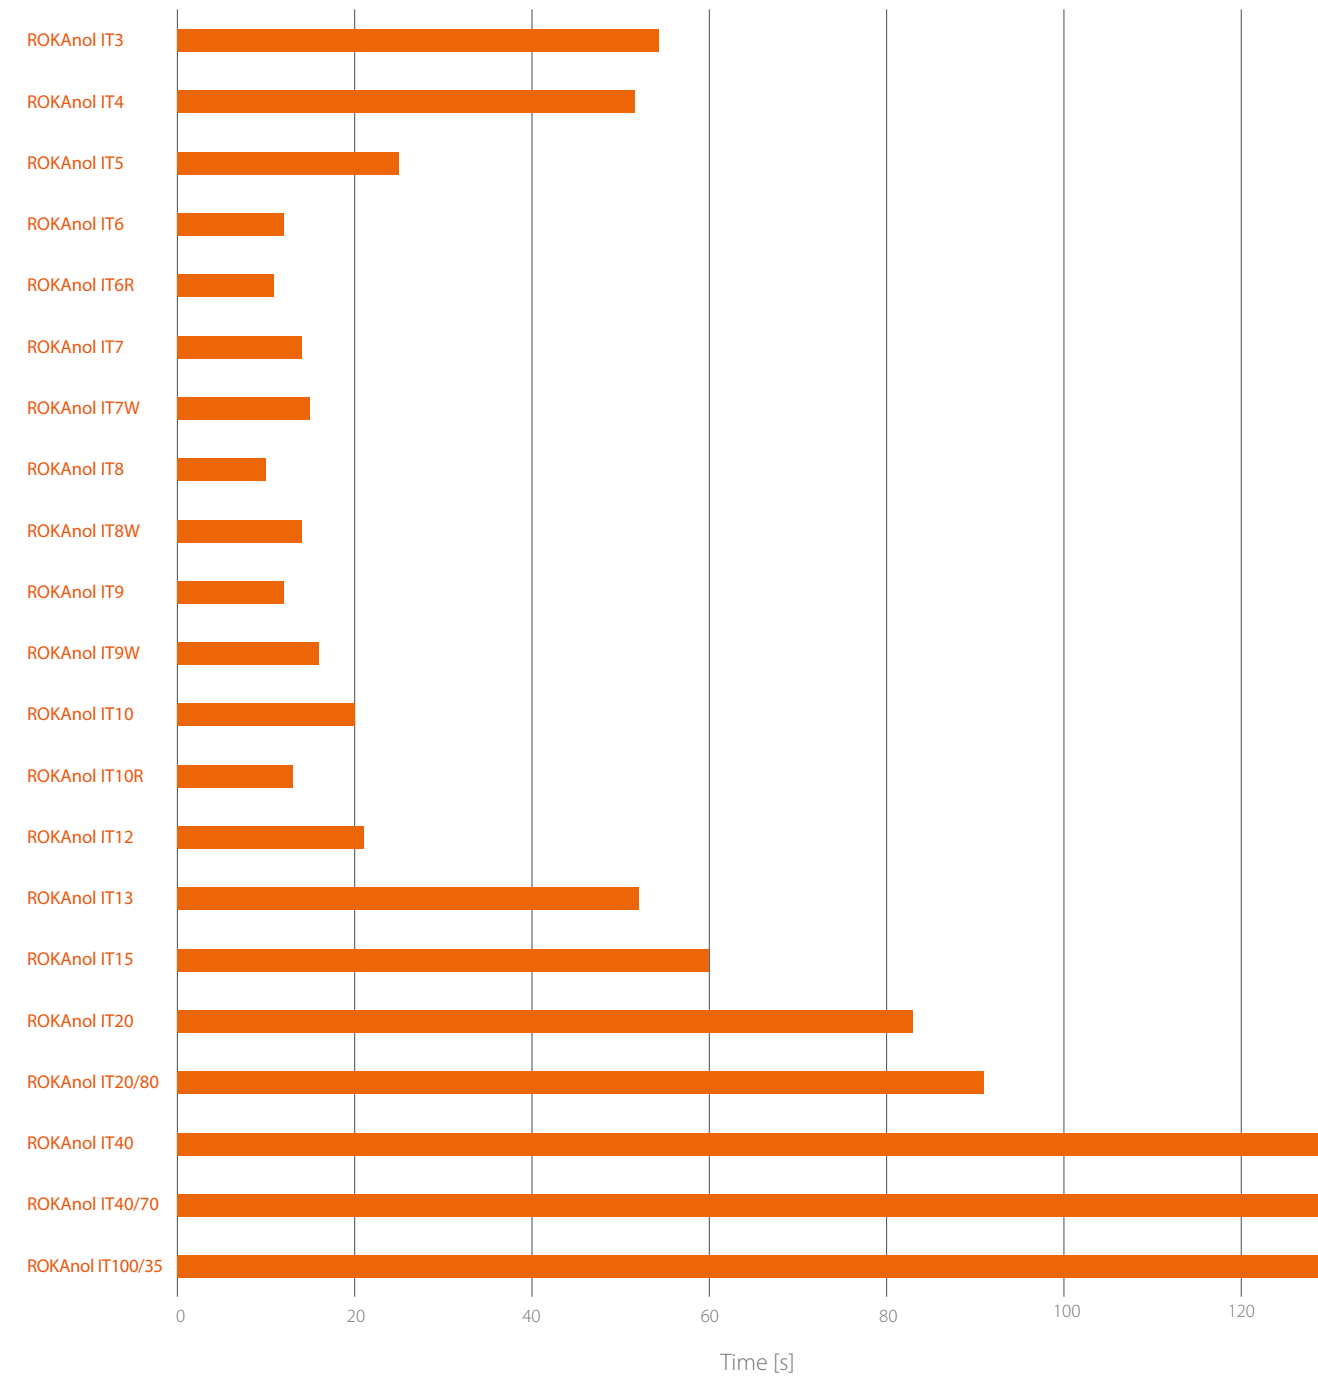

Wetting time is highly depended on ethoxylation degree and HLB. The lowest wetting time is observed for HLB in range of 11.0 - 13.0.

The best wetting agents are ROKAnol IT6R, ROKAnol IT8 and ROKAnol IT9.

Effective wetting capability is particularly important in case of the textile industry processes


Foaming capability

Determination of the foaming capability was performed according to **PN-ISO 696:1994** (the modified Ross-Miles method) for the ROKAnol IT Series solutions with a concentration of 1.0 g/L in deionised water at a temperature of 25°C. The ROKAnol IT Series display lower foaming


capability in comparison to anionic surfactants for which the average foam volume obtained after 5 minutes is approximately 430 ml (alkylethersulfates). The foaming properties change with increasing product ethoxylation degree.



Foaming capability in demineralized water

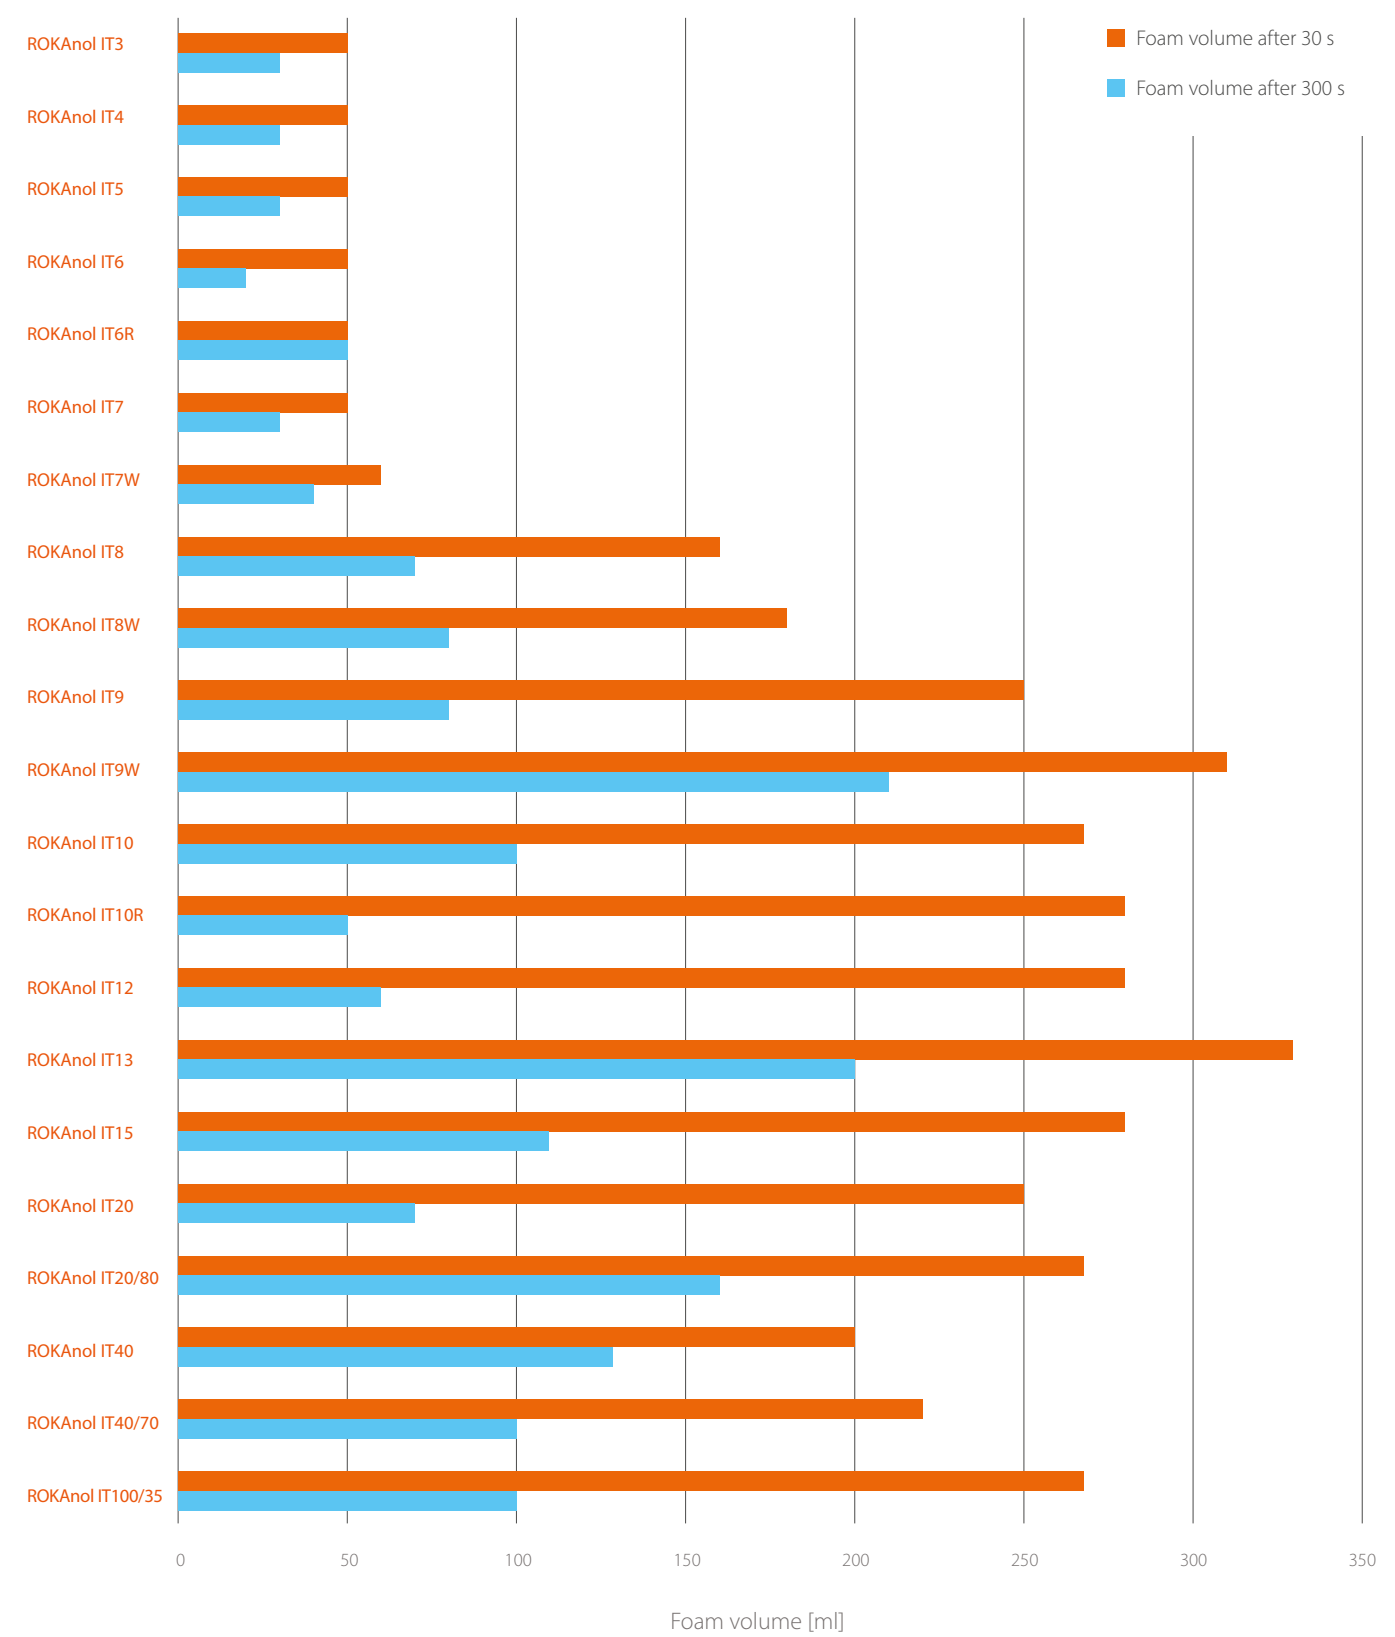

Foaming capability in hard water with calcium hardness of 3 Ca²⁺ mmol/L (17°d)

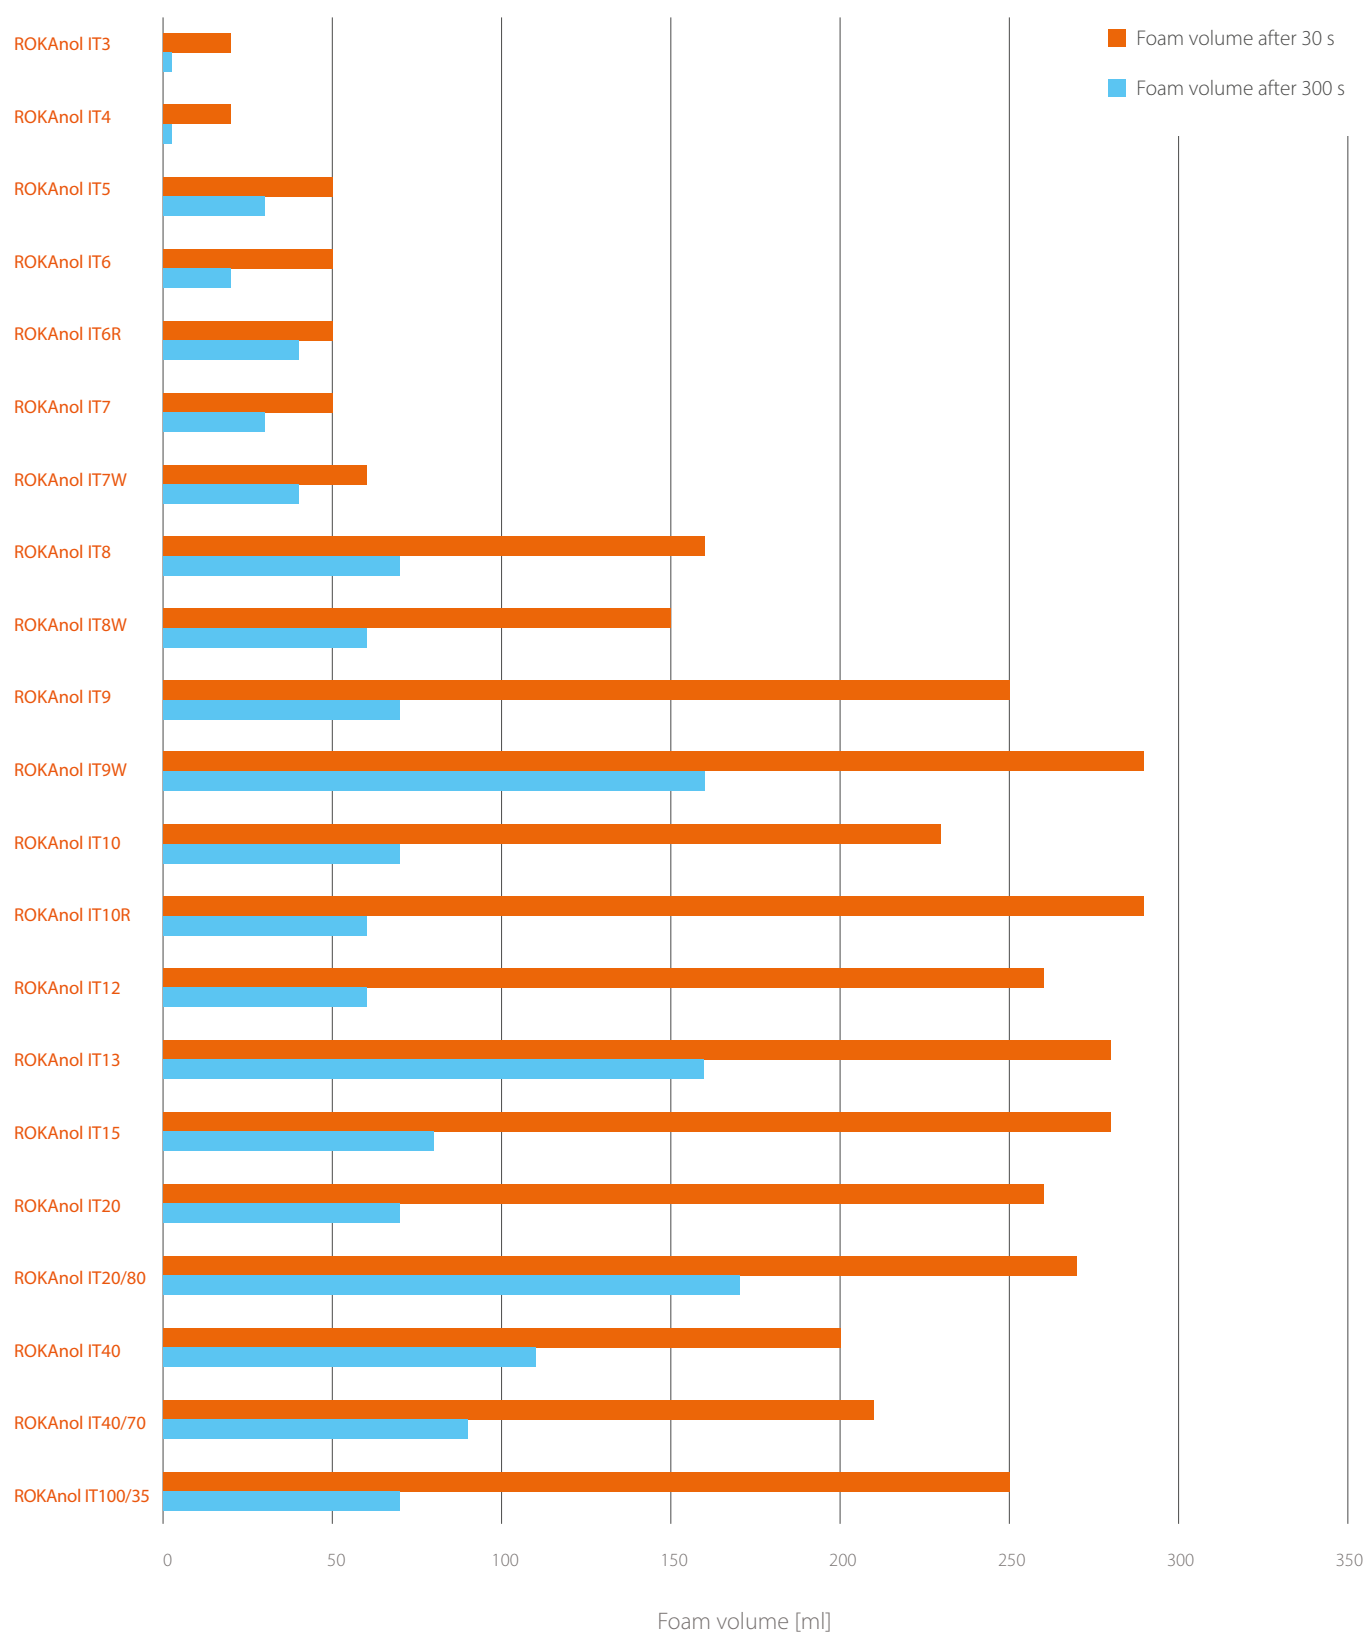

Alkali and acid resistance

Determination of capability to form stable solutions in the acid and alkaline environment was performed according to **PN-EN 14712:2005** at a temperature of 20°C. Stability in the alkaline environment is defined as the maximum concentration of sodium hydroxide (with minimum purity of 98%) in g/L in a stable surfactant

solution with a concentration of 1% (as active substance). Stability in the acid environment is defined as the maximum concentration of sulphuric acid (with purity in the range between 95% and 98%) in ml/L in a stable surfactant solution with a concentration of 1% (as active substance).

Alkali resistance (Sodium Hydroxide); concentration of 1% active matter; temperature 20°C

Product	NaOH Concentration [g/L]								
	10	20	30	40	50	60	70	80	110
ROKAnol IT3	insoluble in water								
ROKAnol IT4	insoluble in water								
ROKAnol IT5	insoluble in water								
ROKAnol IT6	•	•	◦						
ROKAnol IT6R	•	•	•	◦					
ROKAnol IT7	•	•	•	◦					
ROKAnol IT7W	•	•	◦						
ROKAnol IT8	•	•	•	◦					
ROKAnol IT8W	•	•	•	•	•	◦			
ROKAnol IT9	•	•	•	•	•	◦			
ROKAnol IT9W	•	•	•	•	◦				
ROKAnol IT10	•	•	•	•	•	•	◦		
ROKAnol IT10R	•	•	•	•	•	◦			
ROKAnol IT12	•	•	•	•	◦				
ROKAnol IT13	•	•	•	•	◦				
ROKAnol IT15	•	•	•	•	•	•	◦		
ROKAnol IT20	•	•	•	•	◦				
ROKAnol IT20/80	•	•	•	•	•	◦			
ROKAnol IT40	•	•	•	•	•	•	◦		
ROKAnol IT40/70	•	•	•	•	•	•	•	•	◦
ROKAnol IT100/35	•	•	•	◦					

• clear, homogenous solution • homogenous, opalescent solution • homogenous, cloudy solution ◦ macroscopic phase separation

Acid resistance (Sulphuric Acid); concentration of 1% active matter; temperature 20°C

Product	H ₂ SO ₄ Concentration [g/L]					
	1	5	20	40	140	225
ROKAnol IT3	insoluble in water					
ROKAnol IT4	insoluble in water					
ROKAnol IT5	insoluble in water					
ROKAnol IT6	•	•	•	•	•	•
ROKAnol IT6R	•	•	•	•	•	•
ROKAnol IT7	•	•	•	•	•	•
ROKAnol IT7W	•	•	•	•	•	•
ROKAnol IT8	•	•	•	•	•	•
ROKAnol IT8W	•	•	•	•	•	•
ROKAnol IT9	•	•	•	•	•	•
ROKAnol IT9W	•	•	•	•	•	•
ROKAnol IT10	•	•	•	•	•	•
ROKAnol IT10R	•	•	•	•	•	•
ROKAnol IT12	•	•	•	•	•	•
ROKAnol IT13	•	•	•	•	•	•
ROKAnol IT15	•	•	•	•	•	•
ROKAnol IT20	•	•	•	•	•	•
ROKAnol IT20/80	•	•	•	•	•	•
ROKAnol IT40	•	•	•	•	•	•
ROKAnol IT40/70	•	•	•	•	•	•
ROKAnol IT100/35	•	•	•	•	•	•


• clear, homogenous solution • homogenous, opalescent solution • homogenous, cloudy solution ◦ macroscopic phase separation

Detergency

Detergency is the ability of the surfactant to remove soils from the fabric surface during the laundering process. Detergency tests were performed using its own method, with an EMPA 125 fabric: soiled with a mixture of oils and carbon black. Cotton was washed at

a temperature 40°C in ROKAnol IT Series solutions. After drying the fabrics and pressing them, the total color difference of the fabric before and after washing, was measured. The higher the difference is, the better detergency properties are for surfactant.

Detergency

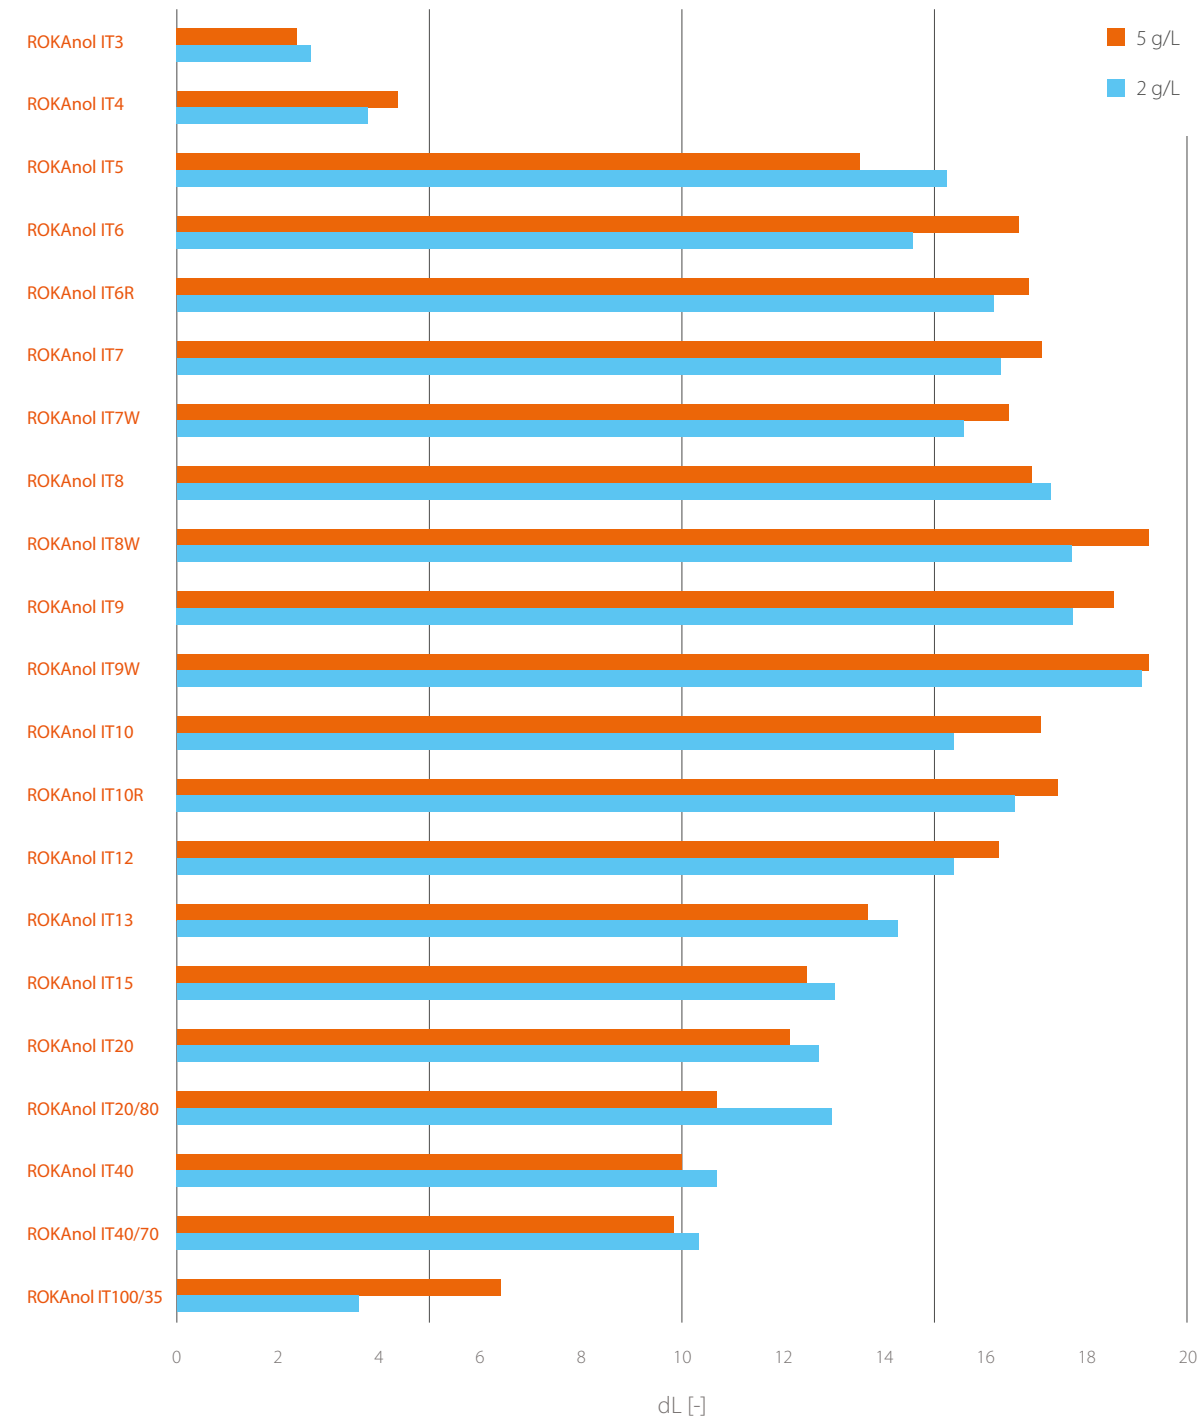

The dL parameter is described by perceptually uniform, trichromatic colour models: CIE LAB and CIE LCH. The following is an interpretation of this parameter: L is defined as lightness (luminosity), while

dL is determined by the equation: $dL = LT - LS$, where: T – tested sample (fabric after the detergency test), S – standard to which the tested sample is compared (fabric before the detergency test).

Solubility

Determination of the solubility of products is carried out by visual evaluation of 1%, 10% and 50% solutions of a given product in a

specified solvent, 24 hours after their preparation. Visually, the appearance of the sample is evaluated according to the following scale:

Result	Appearance of the test sample
1	Homogeneous clear
2	Homogeneous opalescent
3	Homogeneous cloudy
4	Macroscopic phase separation

The results of the samples (1%, 10% and 50%) are added up and on this basis the solubility of the product is determined. The following

table gives the solubility scales according to the sum of the appearance scale results:

Sum	Solubility
3 – 6	Soluble
7 – 9	Partially soluble
10 – 12	Insoluble

Product	Water	Methanol	Eter	Aceton
ROKAnol IT3	Insoluble	Soluble	Insoluble	Soluble
ROKAnol IT4	Insoluble	Soluble	Insoluble	Soluble
ROKAnol IT5	Insoluble	Soluble	Insoluble	Soluble
ROKAnol IT6	Insoluble	Soluble	Insoluble	Soluble
ROKAnol IT6R	Insoluble	Soluble	Partially soluble	Soluble
ROKAnol IT7	Insoluble	Soluble	Partially soluble	Soluble
ROKAnol IT7W	Insoluble	Soluble	Insoluble	Soluble
ROKAnol IT8	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT8W	Soluble	Soluble	Soluble	Soluble
ROKAnol IT9	Soluble	Soluble	Partially soluble	Soluble
ROKAnol IT9W	Soluble	Soluble	Partially soluble	Soluble
ROKAnol IT10	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT10R	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT12	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT13	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT15	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT20	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT20/80	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT40	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT40/70	Soluble	Soluble	Insoluble	Soluble
ROKAnol IT100/35	Soluble	Soluble	Insoluble	Soluble



PCC Exol SA

Sienkiewicza 4

56-120 Brzeg Dolny, Poland

products@pcc.eu

Please visit our capital group business platform:

www.products.pcc.eu



September 2026

The information in the catalogue is believed to be accurate and compiled to the best of our knowledge; however, it should be considered as introductory only. Detailed information about our products is available in TDS and MSDS.

The suggestions for product applications are based on our best knowledge.

The responsibility for the use of products in conformity or otherwise with the suggested application, and for determining product suitability for the user's own purposes rests with the user.

All copyright and trademark rights, as well as other intellectual and industrial property rights and the resulting rights to use this publication and its contents have been transferred to PCC Rokita SA or PCC EXOL SA or its licensors. All rights reserved.

Users/readers are not entitled to reproduce this publication in whole or in part, nor are they entitled to reproduce it (excluding reproduction for personal use) or to transfer it to third parties.

Permission to reproduce it for personal use does not apply to data used in other publications, electronic information systems, or other media publications. PCC Rokita SA and PCC EXOL SA shall not be responsible for data published by users.